




**PANDUAN PERMOHONAN PEMBELIAN YANG DIPOHONKAN MENGIKUT SPESIFIKASI**

BIL.	JENIS BARANG	PART NUMBER	KUANTITI DIPOHONKAN	SPESIFIKASI	CONTOH GAMBAR
(a)	(b)	(c)	(d)	(e)	(f)
1.	Bladder	CR402.025	14 EA	<ul style="list-style-type: none"> <li>• Type: <b>Internal hydraulic bladder</b></li> <li>• Material: <b>Oil-resistant aviation-grade rubber</b></li> <li>• Function: <b>Seals and contains hydraulic pressure during jack lifting operation</b></li> <li>• Installation location: <b>Inside hydraulic jack cylinder</b></li> <li>• Operational role: Ensures controlled pressure build-up, prevents internal leakage, and maintains jack lifting efficiency</li> </ul>	

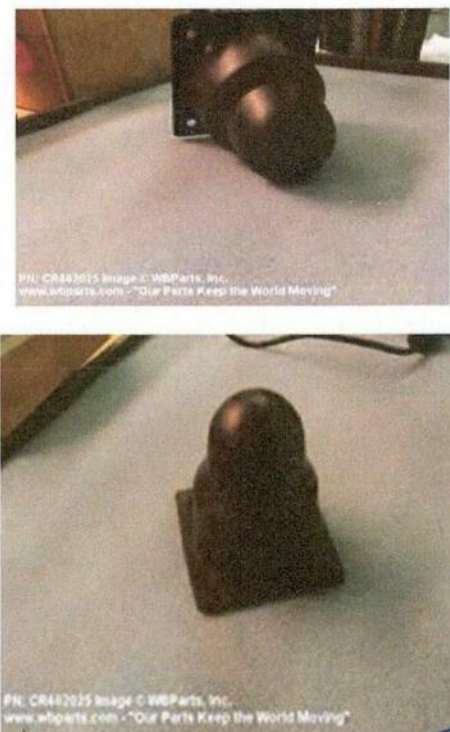


BIL.	JENIS BARANG	PART NUMBER	KUANTITI DIPOHONKAN	SPEKIFIKASI	CONTOH GAMBAR
(a)	(b)	(c)	(d)	(e)	(f)
2.	8 Ton Jack	W-245-22C	04 EA	<ul style="list-style-type: none"> <li>• Capacity: <b>8 tons (8,000 kg) maximum load</b></li> <li>• Function: Lifting and supporting aircraft wheels during ground handling and maintenance</li> <li>• Type: Hydraulic jack</li> <li>• Compatibility: <b>Bell 214ST</b> ground handling wheel system</li> <li>• Operation: Manual hydraulic lifting with controlled lowering</li> <li>• Construction: Heavy-duty steel body for aviation ground support use</li> <li>• Safety Features: Internal overload protection and pressure retention capability under static load</li> </ul>	




BIL.	JENIS BARANG	PART NUMBER	KUANTITI DIPOHONKAN	SPESIFIKASI	CONTOH GAMBAR
(a)	(b)	(c)	(d)	(e)	(f)
3.	Repair Kit	JHA73K	14 EA	<ul style="list-style-type: none"> <li>• Type: <b>Repair / Seal Kit</b></li> <li>• <b>Contents:</b> <ul style="list-style-type: none"> <li>- Replacement U-cup seals</li> <li>- O-rings</li> <li>- Back-up rings</li> <li>- Dust wiper / scraper</li> <li>- Wear rings</li> <li>- Grease packet</li> </ul> </li> <li>• Function: Supports operational use and maintenance of ground handling wheels</li> <li>• Seal Material: Usually <b>polyurethane &amp; NBR (Nitrile) elastomer.</b></li> <li>• Application: <b>MBB BO105 helicopter</b></li> </ul>	


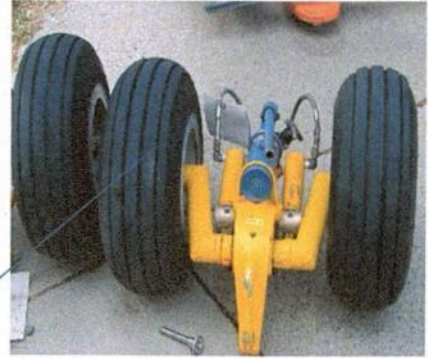


BIL.	JENIS BARANG	PART NUMBER	KUANTITI DIPOHONKAN	SPESIFIKASI	CONTOH GAMBAR
(a)	(b)	(c)	(d)	(e)	(f)
4.	Tire	5.00 x 5 – 6PR	28 EA	<ul style="list-style-type: none"> <li>• Tire Size: <b>5.00 x 5</b></li> <li>• Ply Rating: <b>6PR</b></li> <li>• Tire Type: <ul style="list-style-type: none"> <li>- Usually <b>solid rubber</b> for durability in ground handling.</li> <li>- Can be <b>pneumatic</b> for smooth outdoor surfaces.</li> </ul> </li> <li>• Typical Dimensions &amp; Ratings: <ul style="list-style-type: none"> <li>- Outer Diameter: <b>30-33 cm</b></li> <li>- Tread Type: <b>Smooth / Block / Ribbed</b></li> <li>- Load Capacity: <b>400-500 kg per tire</b></li> <li>- Recommended Pressure: <b>2-4 bar (29- 58 psi) for pneumatic</b></li> <li>- Wheel Type: Ground handling (trolley, cart, industrial vehicle)</li> </ul> </li> <li>• Compatibility: <b>MBB BO105 helicopter</b></li> </ul>	




BIL.	JENIS BARANG	PART NUMBER	KUANTITI DIPOHONKAN	SPESIFIKASI	CONTOH GAMBAR
(a)	(b)	(c)	(d)	(e)	(f)
5.	Tube	5.00 x 5TR67A	28 EA	<ul style="list-style-type: none"> <li>• Tube Size: <b>5.00 x 5 TR67A</b></li> <li>• Tube Type: <ul style="list-style-type: none"> <li>- <b>Pneumatic inner tube</b>, designed to fit <b>pneumatic tires of BO 105</b> ground handling wheels.</li> <li>- Ensures <b>proper air retention</b> and <b>cushioning</b> for the wheel</li> </ul> </li> <li>• Material: <ul style="list-style-type: none"> <li>- <b>Butyl rubber</b></li> <li>- Provides <b>good air retention, chemical resistance, and durability.</b></li> </ul> </li> <li>• Recommended Inflation Pressure: <ul style="list-style-type: none"> <li>- Typically, <b>2-4 bar (29-58 psi).</b></li> </ul> </li> </ul>	




BIL.	JENIS BARANG	PART NUMBER	KUANTITI DIPOHONKAN	SPESIFIKASI	CONTOH GAMBAR
(a)	(b)	(c)	(d)	(e)	(f)
6.	Repair Kit	EBJ8GMK	08 EA	<ul style="list-style-type: none"> <li>• Type: <b>Seal &amp; gasket repair kit</b></li> <li>• <b>Contents:</b> <ul style="list-style-type: none"> <li>- Backup Rings</li> <li>- Gaskets &amp; Washers</li> <li>- Pump Piston Seals</li> <li>- Main Ram Seals</li> <li>- Valve Gaskets</li> <li>- Wiper Seal</li> </ul> </li> <li>• Compatibility: <b>Bell 212 helicopter</b></li> </ul>	
7.	8 Ply Tire	18 x 5.5 Tire	12 EA	<ul style="list-style-type: none"> <li>• Overall Diameter: <b>457mm (18 inch)</b></li> <li>• Section Width: <b>140 mm (5.5 inch)</b></li> <li>• Load Rating: <b>500-550 kg (1,100-1,200 lbs.) per tire</b></li> <li>• Inflation Pressure: <b>110-120 psi</b></li> <li>• Tread: <b>Ribbed</b></li> <li>• Type: <b>Tube-type tire</b></li> <li>• Compatibility: <b>Bell 212 helicopter</b></li> </ul>	





BIL.	JENIS BARANG	PART NUMBER	KUANTITI DIPOHONKAN	SPESIFIKASI	CONTOH GAMBAR
(a)	(b)	(c)	(d)	(e)	(f)
8.	Optional Tube	18 x 5.5Tube	12 EA	<ul style="list-style-type: none"> <li>• Valve Type: <b>TR67A</b></li> <li>• Material: <b>Butyl rubber</b></li> <li>• Operating Pressure: Up to <b>120 psi</b></li> <li>• Use: Designed specifically for aviation/GSE <b>tube type tires</b></li> </ul>	



BIL.	JENIS BARANG	PART NUMBER	KUANTITI DIPOHONKAN	SPESIFIKASI	CONTOH GAMBAR
(a)	(b)	(c)	(d)	(e)	(f)
9.	8 Ton Jack	W-245-22B	04 EA	<ul style="list-style-type: none"> <li>• Capacity: <b>8 tons (16,000 lbs. / 7,257 kg)</b></li> <li>• Hydraulic Ram Lift: <b>20-25 inches (510-635 mm)</b></li> <li>• Screw Extension: <b>10 inches manual fine adjustment</b></li> <li>• Total Lift Range: <b>22 inches (min height) to 50 inches (max height)</b></li> <li>• Pump: Hand pump built into jack (single-acting ram)</li> <li>• Overload Protection: Pressure relief/bypass valve built in</li> <li>• Compatibility: <b>Bell 212 helicopter</b></li> </ul>	



BIL.	JENIS BARANG	PART NUMBER	KUANTITI DIPOHONKAN	SPESIFIKASI	CONTOH GAMBAR
(a)	(b)	(c)	(d)	(e)	(f)
10.	8 Ply Tire	W-18 x 5.5 TR	08 EA	<ul style="list-style-type: none"> <li>• Tire Type: <b>Tube Type</b></li> <li>• Outside Diameter: <b>18.1 inch (460 mm)</b></li> <li>• Section Width: <b>5.6 inch (142 mm)</b></li> <li>• Inflation Pressure: <b>95-100 psi</b></li> <li>• Max Load Capacity: <b>1,820 lbs. (825 kg) per tire</b></li> <li>• Tread Design: <b>Ribbed</b></li> <li>• Weight: <b>14 – 16 lbs. (6.5-7.5 kg)</b></li> <li>• Compatibility: <b>Bell 214ST</b></li> </ul>	
11.	Tire 10 Ply	W-5.00 x 5 TR	08 EA	<ul style="list-style-type: none"> <li>• Tire Type: <b>Tube type</b></li> <li>• Construction: <b>Bias-ply, ribbed tread</b></li> <li>• Outside Diameter: <b>13.8 – 14.2 inch (350 – 360 mm)</b></li> <li>• Overall Width: <b>5.0 – 5.3 inch (127 – 135 mm)</b></li> <li>• Max Load Capacity: <b>1,400 – 1,500 lbs. (635 – 680 kg)</b></li> <li>• Inflation Pressure: <b>120 – 130 PSI</b></li> <li>• Weight (per tire): <b>9 – 11 lbs. (4 – 5 kg)</b></li> <li>• Compatibility: <b>Bell 214ST</b></li> </ul>	



BIL.	JENIS BARANG	PART NUMBER	KUANTITI DIPOHONKAN	SPESIFIKASI	CONTOH GAMBAR
(a)	(b)	(c)	(d)	(e)	(f)
12.	Tube	W-5.00 x 5 TB	08 EA	<ul style="list-style-type: none"> <li>• Type: <b>Inner tube</b></li> <li>• Tire Compatibility: Fits 5.00 x 5 tires (all ply ratings, including 6-ply, 8-ply, and 10-ply)</li> <li>• Valve Type: <b>TR-67A</b></li> <li>• Construction: <b>Natural rubber / butyl blend</b></li> <li>• Compatibility: <b>Bell 214ST</b></li> </ul>	